

## Machine Usinage JFP300VF

[Read More](#)

**SKU:** 3DWCWV5JFJ76J

**Price:** 65,909.09 DH (HT)

**Stock:** instock

**Categories:** [Cnc](#), [Best Deal](#)



### Product Description

**MULTI USE LATHE FEATURES:** The SKF bearing is used for the spindle, which is more accurate than other machines, with smaller sound and longer life. It is very convenient to disassemble and use the C-type spindle. After only loosening the three nuts, the chuck can be replaced by rotating the locking disc. Full metal gear, low noise, CNC machine tool shifting solution. Adopt 1.5KW variable frequency motor.

#### STANDARD ACCESSORIES :

3-jaw chuck  
Dead centers  
Reductions sleeve  
Change gears  
Oil gun  
Some tools

#### OPTIONAL ACCESSORIES

Steady rest  
Follow rest  
Face plate  
4 jaw chuck  
Live center  
Stand  
Lathe tools  
Thread chasing dial  
Lead screw cover  
Tool post cover  
Disc milling cutter  
Mill chuck  
Side brake


#### SPECIFICATIONS:

<b>MODEL</b>	<b>JYP300VF</b>
Distance between centers	700 mm
Swing over bed	300 mm
Swing over cross slide	175 mm
Taper of spindle bore	MT5
Spindle bore	38 mm
Number of spindle speeds	Variable
Range of spindle speeds	30-3000 rpm
Range of longitudinal feeds	0.07-0.65 mm/r
Range of inch threads	8-56 T.P.I./21kinds

Range of metric threads	0.2-3.5 mm/18kinds
Top slide travel	80 mm
Cross slide travel	140 mm
Tailstock quill travel	94mm
Taper of tailstock quill	MT3
Motor	1.5 kw
Mill & drill	
Taper of spindle bore	MT2
Max drilling capacity	20mm
End milling capacity	16mm
Face milling capacity	63mm
The width of Tslot	10mm
Spindle speed(variable speed)	50-2250 rpm
Motor	750W
Packing size	1400x750x1010 mm
Net weight	300/340 kg

**PRODUCTS DETAILS**

**HOTON MACHINERY CO.,LTD**

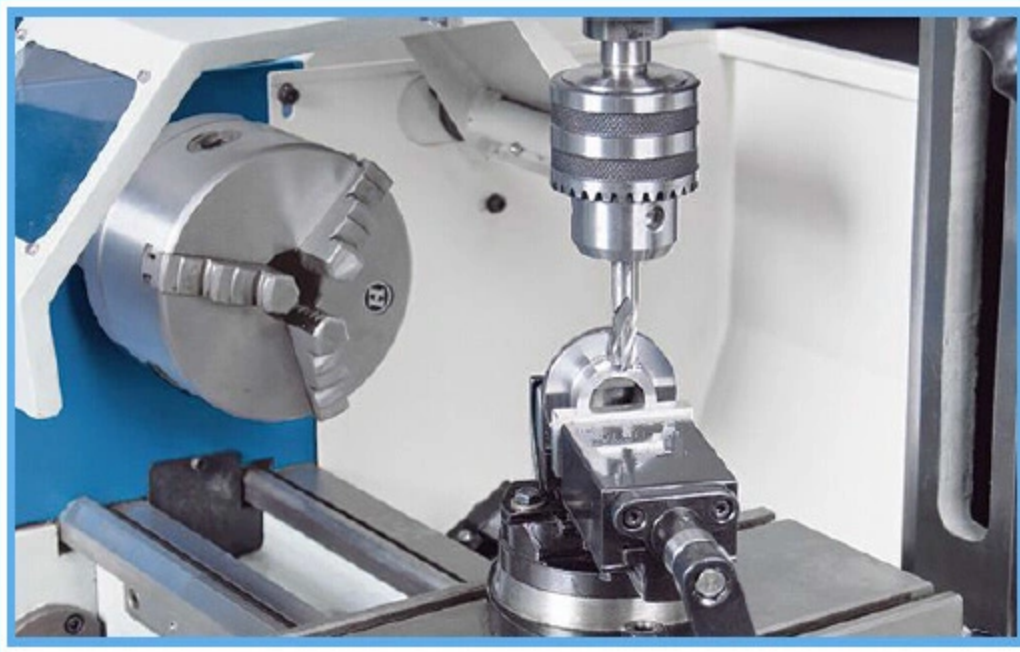

**1**  
REASON

Milling head tilt  $\pm 90$  degree, geared mill

head gets more torque

Standard 4-position change tool post

Chip protection at the top slide

**2**  
REASON



**3**

OPTIONAL ACCESSORIES

HOTON MACHINERY CO.,LTD

